


Wiring Cable with Graphite Shield

Item Code: 1E00199

CVS LK02N3

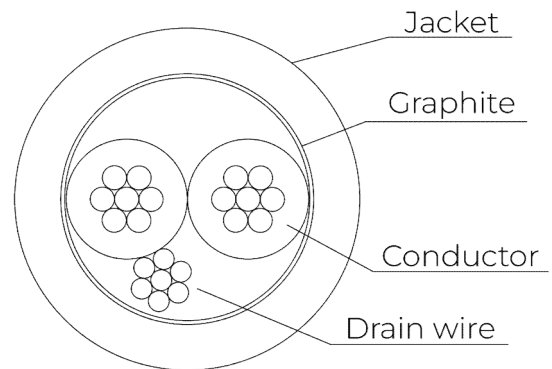

General Data

Application	Installation
Cable O.D. (mm)	3.7
Standard Reels (m)	200
Reel Material	Cardboard
Signal Type	Analog Audio

Mechanical Data

Max Operating Temperature (°C)	70
Min Operating Temperature (°C)	-20
Weight (Kg/100m)	2.00
Bending Radius (xO.D.)	10

Conductor

Material	Flexible electrolytic tinned copper
Quantity	2
Strands	7
Strands O.D. (mm)	0.203
AWG	24

Insulation

Insulation O.D. (mm)	1
----------------------	---

Shield

Material	Semi-conductive graphite
Drain Wire Material	Tinned copper

Jacket

Material	PVC TM2
Nominal Thickness (mm)	0.5

Electrical Data

Conductor/Conductor Capacitance (pF/m)	75
Max Conductor DCR (ohm/km)	94.2
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000

Standards and Compliance

Standard reference	Low Voltage European Directive No. 2014/35/EU
	UL 1581
	EN 50363-4-1
	UL 758
	IEC 60332-3-24

Additional Information

Notes	Not suitable for applications above 50 volt ac; 75 volt dc.
-------	---