


2.08 mm² Chain Hoist Power + Control Hybrid Cable

Item Code: 1E00304

CVS LKCTL 16/7

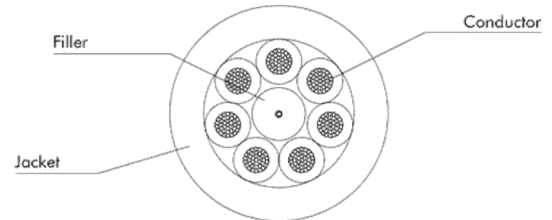

General Data

Application	Mobile
Cable O.D. (mm)	14.8
Standard Reels (m)	305
Reel Material	Wooden

Standards and Compliance

Standard reference	IEC 60332-1-2
	UL 1581
	UL 758
	UL 2556

Mechanical Data

Max Operating Temperature (°C)	90
Min Operating Temperature (°C)	-15
Weight (Kg/100m)	29.3
Bending Radius (xO.D.)	10

Conductor

Material	Bare copper
Quantity	7
Strands	27
Strands O.D. (mm)	0.26
Area (mm ²)	2.08
AWG	16

Insulation

Material	PVC Compound
----------	--------------

Jacket

Material	PVC
Color	Black

Electrical Data

Max Conductor DCR (ohm/km)	13.7
Rated Voltage (Vac)	600
Test Voltage (Vac)	2000