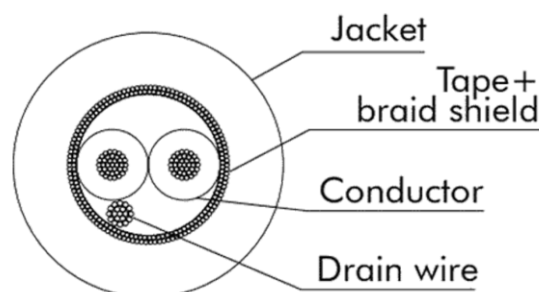


eurocable


24 AWG AES/DMX Digital Cable
Item Code: 1E00309
CVSLKD2P6DS


General Data

Application	Mobile
Cable O.D. (mm)	6
Signal Type	Analog Audio
	Digital Audio
	Control
	DMX
Standard Reels (m)	100
Reel Material	Cardboard

Standards and Compliance

Flame Retardancy	IEC 60332-3-24
Standard reference	Low Voltage European Directive No. 2014/35/EU
	EN 50363-4-1
	IEC 60332-3-24

Mechanical Data

Bending Radius (xO.D.)	10
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	70
Weight (Kg/100m)	4.80

Conductor	
Quantity	2
Material	Tinned copper
Strands	7
Strands O.D. (mm)	0.203
Area (mm ²)	0.22
AWG	24
Insulation	
Material	PEE
Insulation O.D. (mm)	1.6
Thickness (mm)	0.5
Color	Transparent, Red
Shield	
Material	Tinned copper
Shield Type	Braid
Coverage	80%
Drain Wire Material	Tinned copper
Jacket	
Color	Purple
Material	PVC
Nominal Thickness (mm)	1
Electrical Data	
Max Conductor DCR (ohm/km)	92
Conductor/Conductor Capacitance (pF/m)	70
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Additional Information	
Notes	Not suitable for applications above 50 volt ac; 75 volt dc.