


eurocable



AES/DMX Digital Wiring Cable

Item Code: 1E00310

CVSLKD4.5-BK

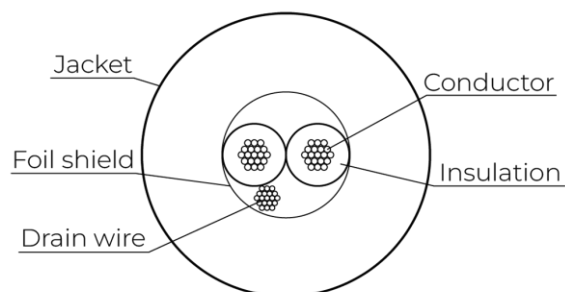

General Data

Application	Installation
Cable O.D. (mm)	4.5
Standard Reels (m)	100
Reel Material	Cardboard

Mechanical Data

Bending Radius (xO.D.)	12
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	65
Weight (Kg/100m)	2.70

Conductor

Strands	18
Strands O.D. (mm)	0.1
Area (mm²)	0.14

Insulation

Material	PEE
Insulation O.D. (mm)	1.5
Thickness (mm)	0.5

Shield

Material	Electrolytic bare copper spiral
Coverage	75%

Jacket

Color	Black
Material	PVC
Nominal Thickness (mm)	0.6

Electrical Data	
Max Conductor DCR (ohm/km)	130
Max Shield DCR (ohm/km)	26
Conductor/Conductor Capacitance (pF/m)	40
Conductor/Shield Capacitance (pF/m)	85
Rated Voltage (Vac)	300
Test Voltage (Vac)	2500