
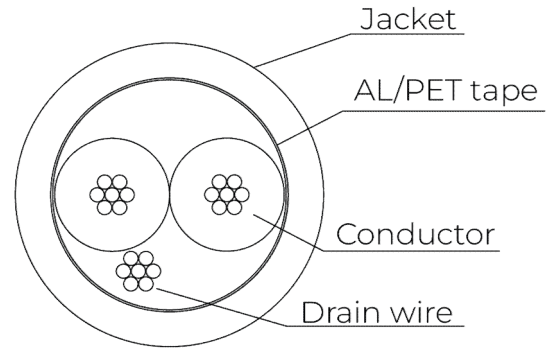


## AES/EBU Wiring Cable with Aluminum Shield

Item Code: 1E00311

CVS LKDD02A

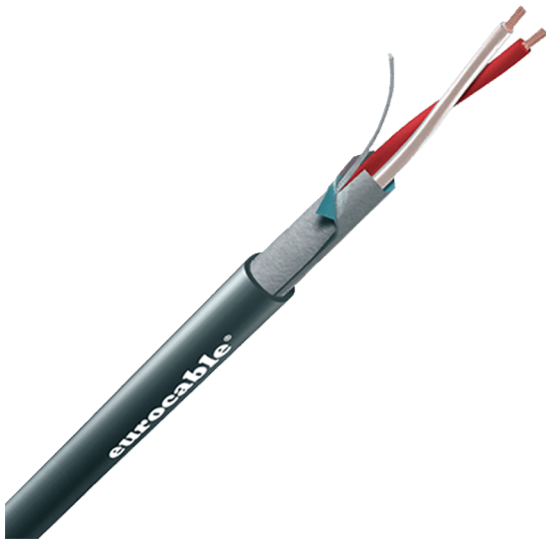

### General Data

Application	Installation
Cable O.D. (mm)	4.3
Standard Reels (m)	500
Reel Material	Cardboard
Signal Type	Analog Audio
	Digital Audio
	Control
	DMX

### Standards and Compliance

Standard reference	IEC 60332-1-2
--------------------	---------------

### Mechanical Data

Max Operating Temperature (°C)	70
Min Operating Temperature (°C)	-20
Weight (Kg/100m)	1.80
Bending Radius (xO.D.)	10

### Conductor

Material	Flexible electrolytic tinned copper
Quantity	2
Strands	7
Strands O.D. (mm)	0.203
AWG	24

### Insulation

Material	Foamed Polyethylene
Thickness (mm)	0.5
Insulation O.D. (mm)	1.6

Shield	
Material	Aluminum - Polyester tape + drain wire
Jacket	
Material	PVC
Color	Grey
Nominal Thickness (mm)	0.5
Electrical Data	
Conductor/Conductor Capacitance (pF/m)	70
Max Conductor DCR (ohm/km)	94.2
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Additional Information	
Notes	Not suitable for applications above 50 volt ac; 75 volt dc.