
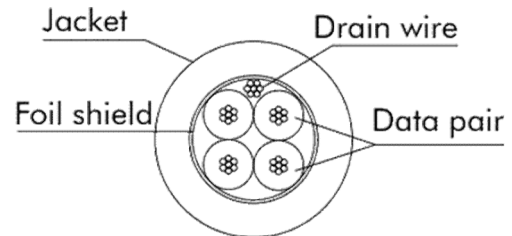


20 AWG Double-Pair DMX Cable

Item Code: 1E00321

CVS LKDMX D L

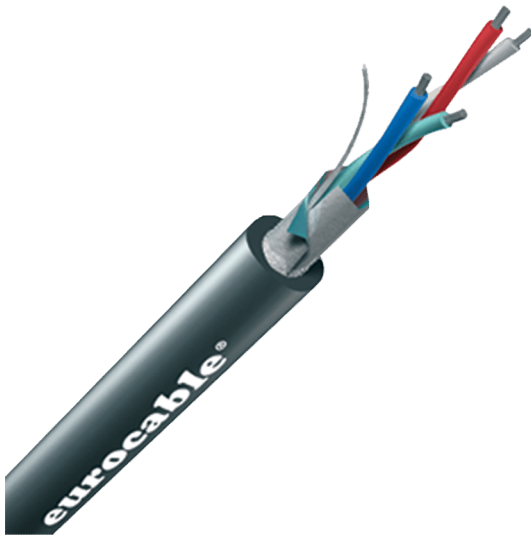

General Data

Application	Mobile
Cable O.D. (mm)	8.5
Signal Type	Digital Control

Mechanical Data

Max Operating Temperature (°C)	70
Min Operating Temperature (°C)	-20
Weight (Kg/100m)	8.20
Bending Radius (xO.D.)	12

Conductor

Material	Flexible electrolytic tinned copper
Quantity	4
Strands	19
Strands O.D. (mm)	0.203
AWG	20

Insulation

Material	Foamed Polyethylene
Thickness (mm)	0.45
Insulation O.D. (mm)	1.9

Shield

Material	Aluminum - Polyester tape + drain wire
Coverage	100%

Jacket

Material	Fire retardant PVC
Color	Black
Nominal Thickness (mm)	0.8

Electrical Data	
Conductor/Conductor Capacitance (pF/m)	45
Conductor/Shield Capacitance (pF/m)	105
Max Conductor DCR (ohm/km)	36.7
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Standards and Compliance	
Standard reference	UL 1581
	IEC 60332-3-24 Cat.C
Additional Information	
Notes	Not suitable for applications above 50 volt ac; 75 volt dc.