



eurocable



20 AWG Double-Pair DMX Cable

Item Code: 1E00321

CVSLKDMXDL

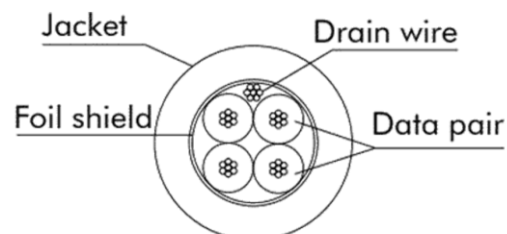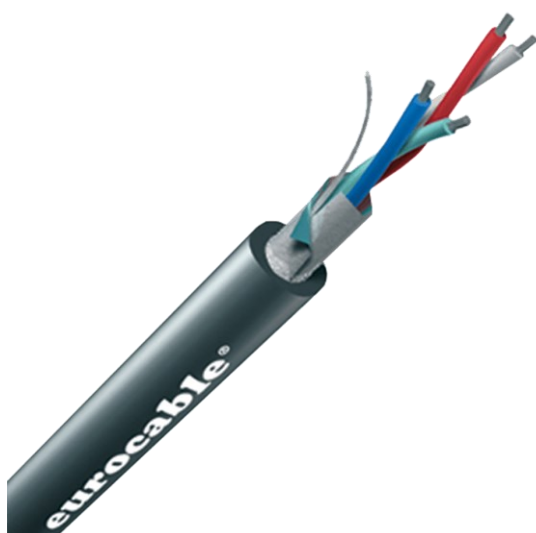

General Data

Application	Mobile
Cable O.D. (mm)	8.5
Signal Type	Analog Audio
	Digital Audio
	Control
	DMX

Standards and Compliance

Standard reference	Low Voltage European Directive No. 2014/35/EU
	UL 1581
	IEC 60332-3-24 Cat.C

Mechanical Data

Bending Radius (xO.D.)	12
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	70
Weight (Kg/100m)	8.20

Conductor

Quantity	4
Material	Flexible electrolytic tinned copper
Strands	19
Strands O.D. (mm)	0.203
Area (mm²)	0.61
AWG	20

Insulation	
Material	Foamed Polyethylene
Insulation O.D. (mm)	1.9
Thickness (mm)	0.45
Shield	
Material	Aluminum - Polyester
Shield Type	Foil
Coverage	100%
Drain Wire Material	Tinned copper
Jacket	
Color	Black
Material	PVC
Nominal Thickness (mm)	0.8
Electrical Data	
Max Conductor DCR (ohm/km)	36.7
Conductor/Conductor Capacitance (pF/m)	45
Conductor/Shield Capacitance (pF/m)	105
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Additional Information	
Notes	Not suitable for applications above 50 volt ac; 75 volt dc.