
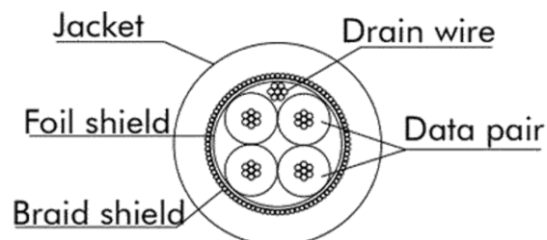


Double-Pair DMX Cable with PUR Jacket

Item Code: 1E00322

CVSLKDMXDPUR

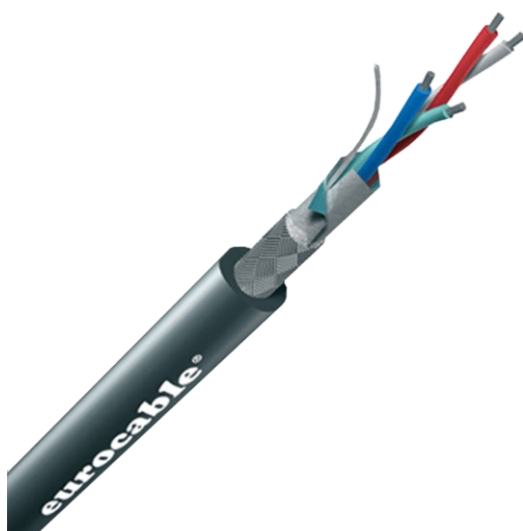

General Data

Application	Mobile
Cable O.D. (mm)	7.9
Signal Type	Analog Audio
	Digital Audio
	Control
	DMX

Standards and Compliance

Standard reference	UL 1581
--------------------	---------

Mechanical Data

Bending Radius (xO.D.)	12
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	70
Weight (Kg/100m)	6.20

Conductor

Quantity	4
Material	Flexible electrolytic tinned copper
Strands	7
Strands O.D. (mm)	0.2
Area (mm ²)	0.22
AWG	24

Insulation

Material	Foamed Polyethylene
Insulation O.D. (mm)	1.9
Thickness (mm)	0.45

Shield	
Material	Aluminum - Polyester
Shield Type	Tape
Coverage	100%
2nd Shield Material	Tinned copper
2nd Shield Type	Braid
2nd Shield Coverage	75%
Jacket	
Color	Black
Material	PUR
Nominal Thickness (mm)	0.8
Electrical Data	
Max Conductor DCR (ohm/km)	36.7
Conductor/Conductor Capacitance (pF/m)	45
Conductor/Shield Capacitance (pF/m)	105
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Additional Information	
Notes	Not suitable for applications above 50 volt ac; 75 volt dc.