


eurocable



Single-Pair DMX Cable

Item Code: 1E00326

CVSLKDMXS

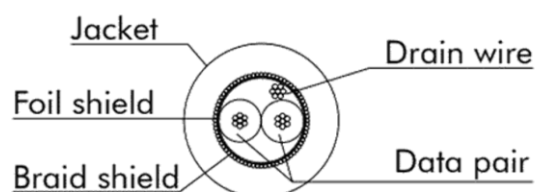

General Data

Application	Installation/Mobile
Cable O.D. (mm)	5.5
Signal Type	Analog Audio
	Digital Audio
	Control
	DMX
Standard Reels (m)	200
Reel Material	Wooden
Reel dimensions (cm)	22x22x21
Reel Weight (kg)	0.3

Standards and Compliance

Standard reference	IEC 60332-3-24 Cat.C
--------------------	----------------------

Mechanical Data

Bending Radius (xO.D.)	8
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	70
Weight (Kg/100m)	2.90

Conductor

Quantity	2
Material	Flexible electrolytic tinned copper
Strands	7
Strands O.D. (mm)	0.203
Area (mm²)	0.25
AWG	24

Insulation	
Material	Foamed Polyethylene
Insulation O.D. (mm)	1.6
Thickness (mm)	0.5
Shield	
Material	Tinned copper
Shield Type	Braid
Coverage	80%
Drain Wire Material	Tinned copper
Jacket	
Color	Black
Material	PVC
Nominal Thickness (mm)	0.9
Electrical Data	
Max Conductor DCR (ohm/km)	94.2
Conductor/Conductor Capacitance (pF/m)	35
Conductor/Shield Capacitance (pF/m)	80
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Additional Information	
Notes	Not suitable for applications above 50 volt ac; 75 volt dc.