


eurocable



Single-Pair DMX Cable with PUR Jacket

Item Code: 1E00328

CVSLKDMXSPUR

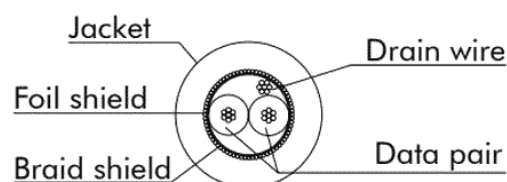

General Data

Application	Installation/Mobile
Cable O.D. (mm)	5.5
Signal Type	Analog Audio
	Digital Audio
	Control
	DMX
Standard Reels (m)	200
Reel Material	Wooden

Standards and Compliance

Standard reference	IEC 60332-3-24 Cat.C
--------------------	----------------------

Mechanical Data

Bending Radius (xO.D.)	8
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	70
Weight (Kg/100m)	3.20

Conductor

Quantity	2
Material	Flexible electrolytic tinned copper
Strands	7
Strands O.D. (mm)	0.203
AWG	24

Insulation	
Material	Polyolefin
Insulation O.D. (mm)	1.6
Thickness (mm)	0.5
Shield	
Material	Aluminum - PET
Shield Type	Tape
Coverage	80%
2nd Shield Material	Electrolytic Copper
2nd Shield Type	Braid
Jacket	
Color	Black
Material	PUR
Nominal Thickness (mm)	0.9
Electrical Data	
Max Conductor DCR (ohm/km)	91
Conductor/Conductor Capacitance (pF/m)	40
Conductor/Shield Capacitance (pF/m)	72
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Additional Information	
Notes	Not suitable for applications above 50 volt ac; 75 volt dc.