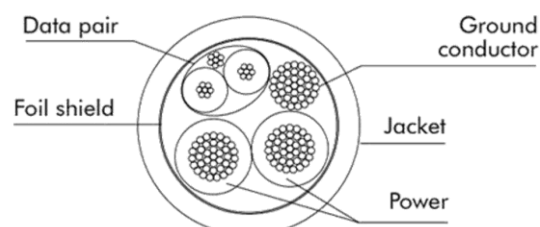
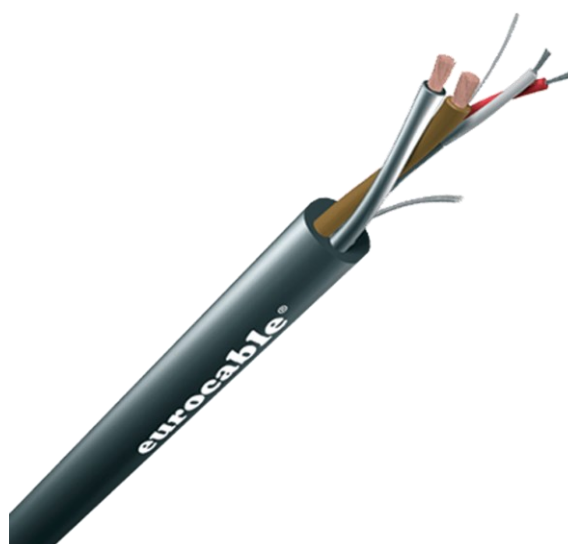


eurocable


DMX + Power Hybrid UV Proof Cable with PUR Jacket
Item Code: IE00335
CVSLKDMXCCPUR-UVML43


General Data	
Application	Installation/Mobile
Cable O.D. (mm)	7.5
Signal Type	Analog Audio
	Digital Audio
	Control
	Power
	DMX
Standard Reels (m)	200
Reel Material	Wooden
Standards and Compliance	
Standard reference	Low Voltage European Directive No. 2014/35/EU
	UL 1581
	UL 758
	EN 50363-10-2
Mechanical Data	
Bending Radius (xO.D.)	8
Min Operating Temperature (°C)	-40
Max Operating Temperature (°C)	80
Conductor - Power	
Strands	43
Strands O.D. (mm)	0.254
AWG	14
Material	Electrolytic Tinned Copper

Insulation - Power	
Insulation O.D. (mm)	2.7
Thickness(mm)	0.45
Material	PVC
Conductor - DMX	
Strands	19
Strands O.D. (mm)	0.1
AWG	26
Material	Electrolytic Tinned Copper
Insulation - DMX	
Insulation Thickness (mm)	0.50
Insulation O.D.(mm)	1.6
Material	Foamed Polyethylene
Shield - DMX	
Material	Aluminum - Polyester
Coverage	100%
Shield Type	Tape
Shield	
Material	Aluminum - Polyester
Shield Type	Tape
Coverage	100%
Drain Wire Material	Tinned copper
Jacket	
Color	Black
Material	Polyurethane
Nominal Thickness (mm)	0.7
Electrical Data	
Conductor/Conductor Capacitance (pF/m)	30
Conductor/Shield Capacitance (pF/m)	70
Rated Voltage (Vac)	300
Test Voltage (Vac)	2000
Electrical Data - DMX	
Max Conductor DCR (ohm/km)	150
Electrical Data - Power	
Max Conductor DCR (ohm/km)	8.96