


# eurocable



## RX75 Miniature HDTV Digital Video Cable

Item Code: 1E00414

CVSLKRX75S2

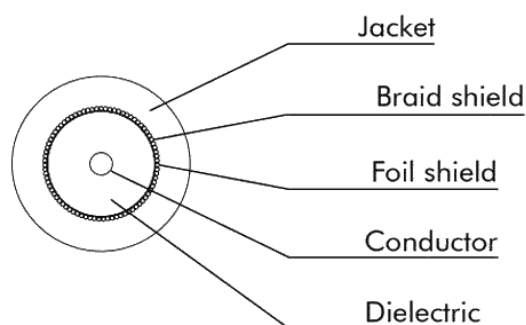

### General Data

|                      |          |
|----------------------|----------|
| Cable O.D. (mm)      | 4.5      |
| Signal Type          | Video    |
| Standard Reels (m)   | 500      |
| Reel dimensions (cm) | 30x30x27 |
| Reel Weight (kg)     | 1.1      |

### Mechanical Data

|                                |      |
|--------------------------------|------|
| Bending Radius (xO.D.)         | 10   |
| Min Operating Temperature (°C) | -25  |
| Max Operating Temperature (°C) | 80   |
| Weight (Kg/100m)               | 2.70 |

### Conductor

|                   |            |
|-------------------|------------|
| Material          | Red copper |
| Strands           | 1          |
| Strands O.D. (mm) | 0.6        |

### Insulation

|                      |      |
|----------------------|------|
| Dielectric O.D. (mm) | 2.80 |
|----------------------|------|

### Shield

|                     |                                 |
|---------------------|---------------------------------|
| Material            | Aluminum - Polyester - Aluminum |
| Shield Type         | Foil                            |
| Coverage            | 100%                            |
| 2nd Shield Material | Tinned copper                   |
| 2nd Shield Type     | Braid                           |
| 2nd Shield Coverage | 90%                             |

## Jacket

|       |       |
|-------|-------|
| Color | Green |
|-------|-------|

|          |     |
|----------|-----|
| Material | PVC |
|----------|-----|

## Electrical Data

|                            |    |
|----------------------------|----|
| Max Conductor DCR (ohm/km) | 62 |
|----------------------------|----|

|                         |    |
|-------------------------|----|
| Nominal Impedance (ohm) | 75 |
|-------------------------|----|

|                      |     |
|----------------------|-----|
| Propagation Velocity | 80% |
|----------------------|-----|

|                           |    |
|---------------------------|----|
| Mutual Capacitance (pF/m) | 56 |
|---------------------------|----|