
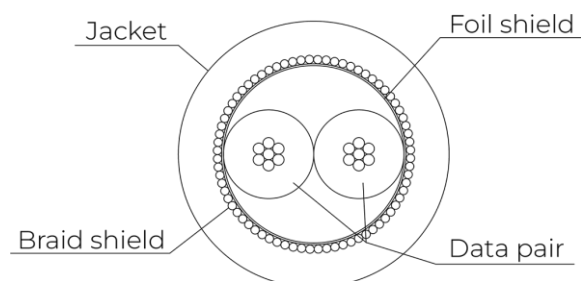


Single-Pair DMX CPR Compliant Cable

Item Code: IE00706

CVSLKDMXSHFCPR-C

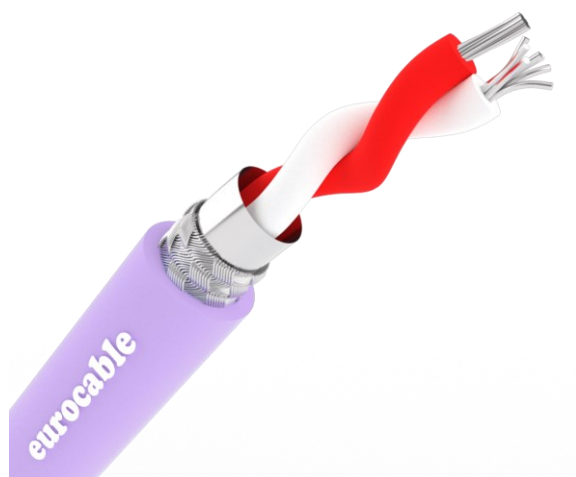

General Data

Application	Installation
Cable O.D. (mm)	6
Signal Type	Analog Audio
	Digital Audio
	Control
	DMX
Standard Reels (m)	500

Standards and Compliance

CPR Class	Cca s1b d1 a1
-----------	---------------

Mechanical Data

Bending Radius (xO.D.)	15
Min Operating Temperature (°C)	-15
Max Operating Temperature (°C)	80
Weight (Kg/100m)	3.90

Conductor

Material	Tinned copper
Strands	7
Strands O.D. (mm)	0.25

Insulation

Material	Polypropylene exp.
Insulation O.D. (mm)	2

Shield

Material	Braided tinned copper + drain wire
Coverage	70%

Jacket	
Color	Purple
Material	Polyolefin
Electrical Data	
Max Conductor DCR (ohm/km)	56
Nominal Impedance (ohm)	110
Max Inductance (μH/100m)	0.884
Insulation Resistance (MΩ/Km)	5000
Mutual Capacitance (pF/m)	42.08
Test Voltage (Vac)	250