



# eurocable



## Double-Pair DMX CPR Compliant Cable

Item Code: 1E00707

CVSLKDMXDHFCPR-C

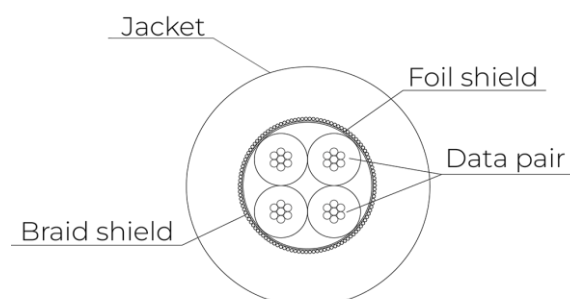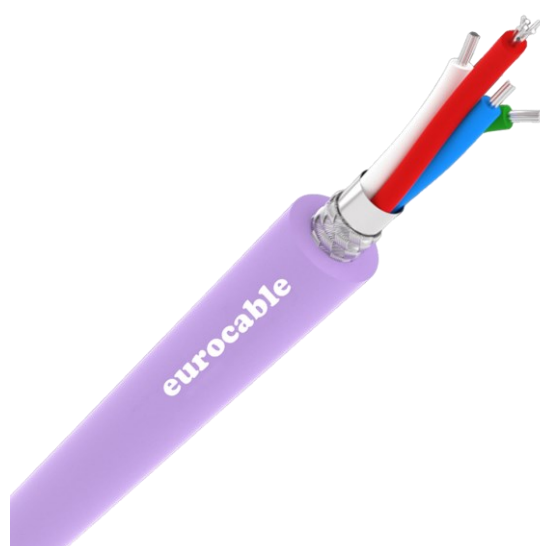

### General Data

|                 |               |
|-----------------|---------------|
| Application     | Installation  |
| Cable O.D. (mm) | 9             |
| Signal Type     | Analog Audio  |
|                 | Digital Audio |
|                 | Control       |
|                 | DMX           |

### Standards and Compliance

|           |               |
|-----------|---------------|
| CPR Class | Cca slb d1 a1 |
|-----------|---------------|

### Mechanical Data

|                                |     |
|--------------------------------|-----|
| Bending Radius (xO.D.)         | 15  |
| Min Operating Temperature (°C) | -15 |
| Max Operating Temperature (°C) | 80  |

### Conductor

|                   |               |
|-------------------|---------------|
| Material          | Tinned copper |
| Strands           | 7             |
| Strands O.D. (mm) | 0.25          |

### Insulation

|                      |                    |
|----------------------|--------------------|
| Material             | Polypropylene exp. |
| Insulation O.D. (mm) | 1.7                |

### Shield

|          |                                    |
|----------|------------------------------------|
| Material | Braided tinned copper + drain wire |
| Coverage | 70%                                |

| Jacket                        |            |
|-------------------------------|------------|
| Color                         | Purple     |
| Material                      | Polyolefin |
| Electrical Data               |            |
| Max Conductor DCR (ohm/km)    | 56         |
| Nominal Impedance (ohm)       | 100        |
| Max Inductance (μH/100m)      | 0.884      |
| Insulation Resistance (MΩ/Km) | 500        |
| Mutual Capacitance (pF/m)     | 42.08      |
| Test Voltage (Vac)            | 250        |