



eurocable



Multi-Circuit Aluminum Power + CAT6A Hybrid Cable

Item Code: 1E00716

CVSLK14A40C2

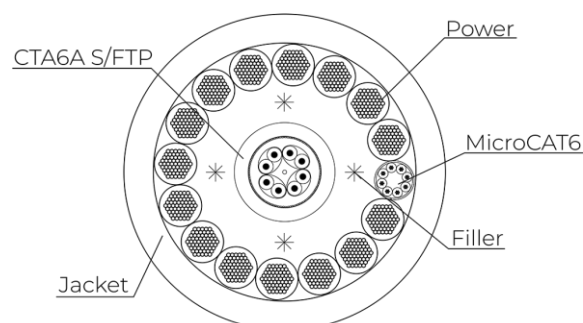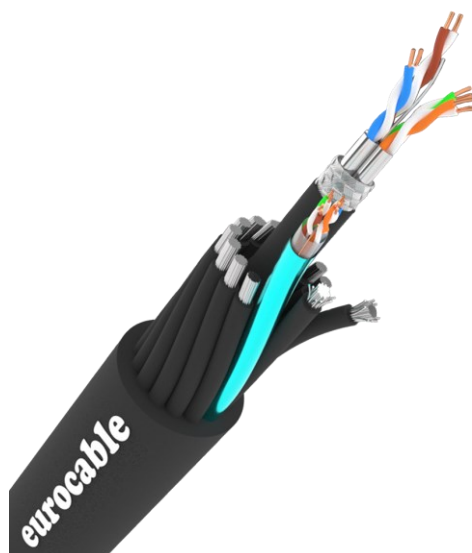

General Data

Cable O.D. (mm)	24.2
Signal Type	Power
	Ethernet
	HDBaseT

Standards and Compliance

Standard reference	IEC 60332-1-2
	UL 1581
	IEC 60228

Mechanical Data

Bending Radius (xO.D.)	15
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	105
Weight (Kg/100m)	61.70

Conductor

Quantity	14
----------	----

Conductor - Power

Strands	59
Strands O.D. (mm)	0.28
Area (mm²)	4

Insulation - Power

Insulation O.D. (mm)	3.5
Thickness(mm)	0.5
Material	PVC

General Data - Data	
Cores	2
Jacket - Data	
Cable O.D. (mm)	7.8
Jacket	
Color	Black
Material	PVC
Nominal Thickness (mm)	1.8
Electrical Data	
Test Voltage (Vac)	5000
Electrical Data - Power	
Max Conductor DCR (ohm/km)	7.98
Rated Voltage (Vac)	1000