


OPTICAL CAMERA CABLE

CVS LKFOHCC

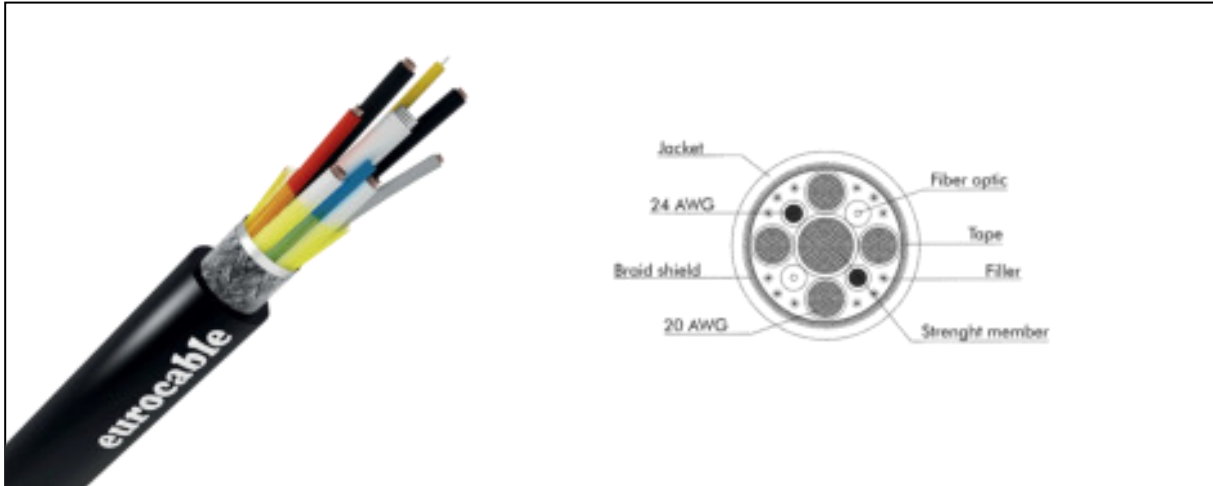

CVS LKFOHCC		
TECHNICAL DATA		
Optical data	Attenuation	< 0.40 dB/Km at 1310 nm
		< 0.25 dB/Km at 1550 nm
Electrical data at 20° C	Conductor resistance	≤ 33.0 ohm/Km (20 AWG)
		≤ 91.0 ohm/Km (24 AWG)
	Insulation resistance	≥ 500 Mohm x Km
	Test voltage	1000 Vdc per 1 min
GENERAL DATA		
Cable	O.D.	9.00 +/- 0.30 mm
	Operating temperature	[-20°C +80°C]
	Storage temperature	[-30°C +80°C]
	Min. static bending radius	7.50 x O.D.
	Min. dynamic bending radius	10 x O.D.
	Weight Kg/100m	10.70
	Max pulling force	20 N/ mm ²
	Tensile strength	> 700 N
Jacket	Material	Flame Retardant LSZH PUR
	Color	Black
	Separator	Fleece tape
	Shield	Tinned copper braid
	Coverage	≥ 80%
	Bundle tape	Fleece tape