


RG179 Miniature HDTV Digital Video Cable

Item Code: 1E00394

CVSLKRG179DS

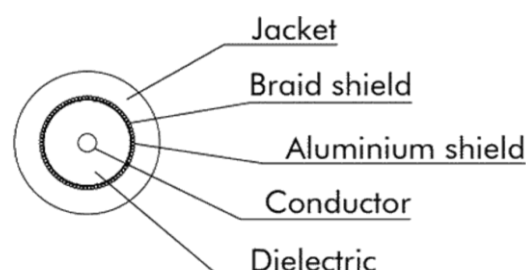

General Data	
Cable O.D. (mm)	2.5
Signal Type	Video
	Digital Audio
Standards and Compliance	
Standard reference	EN 50363
	2011/65/EU Directive (RoHS)
Mechanical Data	
Bending Radius (xO.D.)	15
Min Operating Temperature (°C)	-20
Max Operating Temperature (°C)	70
Weight (Kg/100m)	0.90
Conductor	
Material	Bare copper
Area (mm ²)	0.07
AWG	29
Insulation	
Material	Foam-Polyolefine
Insulation O.D. (mm)	1.4

Shield	
Material	Aluminum - Polyester
Shield Type	Foil
Coverage	100%
2nd Shield Material	Tinned copper
2nd Shield Type	Braid
2nd Shield Coverage	95%
Jacket	
Color	Grey
Material	PVC
Electrical Data	
Max Conductor DCR (ohm/km)	277
Conductor/Shield Capacitance (pF/m)	54
Attenuation @ 1500 MHz (db/100m)	89
Attenuation @ 3000 MHz (dB/100m)	130
Attenuation @ 6000 MHz (db/100m)	193
Rated Voltage (Vac)	30
Test Voltage (Vac)	500